

# Crane unster model KW-X

In rigid stainless steel housing IP67, provided with large LED DOT display, maximum visibility from all angles and in any lighting condition, 40 mm character height. Suitable for both indoor- and outdoor use. Minimal reduction of lifting space by the minimal overall height.



### Properties

- capacity from 0 - 3 ton up to 0 - 55 ton
- application not for legal trade
- inclusive infrared remote control, up to 8 m distance; programmable as single key automatic tare or as 4-key remote control
- sturdy, stainless steel housing IP67, for industrial application
- clearly readable LED-DOT display in any lighting condition (including direct sunlight), 40 mm character height
- supplied with verified galvanised upper- and lower shackle
- compact dimensions, minimal distance between upper- and lower shackle
- waterprotected keyboard with 5 function keys (zeroing, automatic or manual tare, mode, print and on/off)
- full range tare function
- functions: cumulative weighing, peak level indication, +/- checkweighing, percentage determination, piece counting, hold-key (weight remains in display when unloaded), indication in lb or kg, high resolution reading (10x more accurate)
- operating temperature -10°C ~ +40°C
- digital setting and calibration, directly programmable by keypad
- programmable digital filter and automatic switching off
- power: internal rechargeable battery, operating time approx. 30 h; internal battery charger 230V


application	not for legal trade							
type	KW-X-3T	KW-X-6T	KW-X-9T	KW-X-12T	KW-X-17T	KW-X-25T	KW-X-30T	KW-X-55T
capacity	3000 kg	6000 kg	9000 kg	12000 kg	17000 kg	25000 kg	30000 kg	50000 kg
division	1 kg	2 kg	5 kg	5 kg	10 kg	10 kg	20 kg	20 kg
accuracy	+/- 0.05% F.S.*			+/- 0.01% F.S.*				
application	<b>M</b> CE verified							
type	KW-X-3TM	KW-X-6TM	KW-X-9TM					
capacity	3000 kg	6000 kg	9000 kg					
division	1 kg	2 kg	5 kg					
accuracy	+/- 0.05% F.S.*							



# Crane unster

## model KW-X

### Dimensions

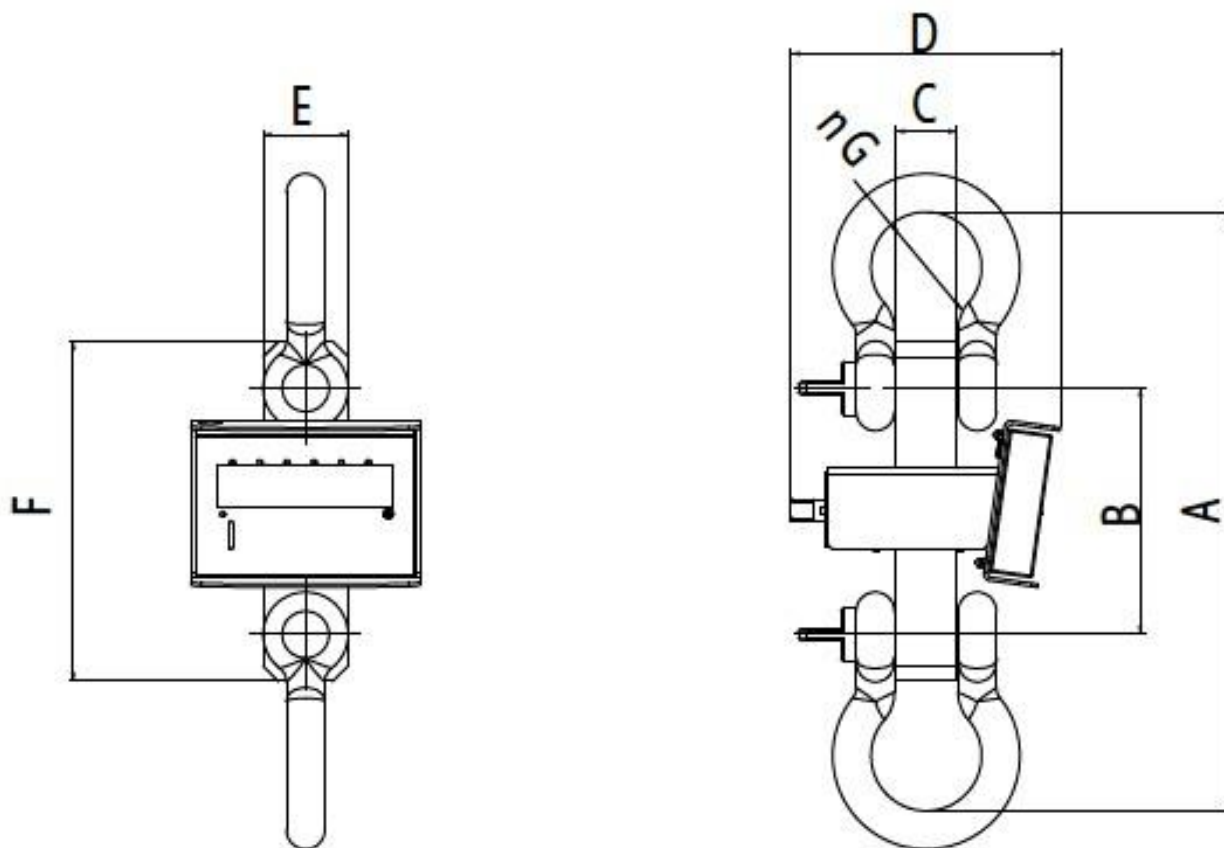

*Dimensions (mm)*

model	Dimensions (mm)							Capacity	Weight in kg	
	A	B	C	D	E	F	G		N*	G*
KW-X-3T(M)	380	186	33	316	80	246	58	3 t	15	16
KW-X-6T(M)	380	186	33	316	80	246	58	6 t	16	17
KW-X-9T(M)	434	186	44	316	80	246	74	9 t	21	22
KW-X-12T	451	186	52	316	100	270	83	12 t	26	35
KW-X-17T	581	220	60	316	100	320	98	17 t	36	74
KW-X-25T	705	290	73	316	100	400	127	25 t	53	91
KW-X-30T	730	280	83	366	105	400	146	30 t	70	108
KW-X-50T	995	370	105	412	130	540	184	50 t	140	178

\* N = nett, excl. packaging  
\* G = gross, incl. packaging

