


# Floor scale series S, pit version

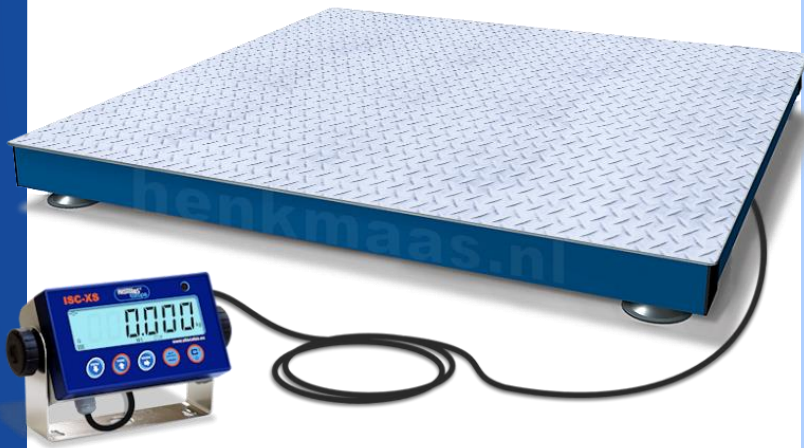

## Properties

- **CE approved**, class III (application for legal trade)
- capacities 0 - 300 kg up to 0 - 10000 kg
- division resp. 0.1 kg - 5 kg
- dimensions l x w 1000 x 1000 mm up to 2000 x 2500 mm
- blue stove enamelled steel tube base construction; very sturdy
- weighing platform top from galvanized diamond plate, removable for maintenance and pit cleaning
- equipped with 4 watertight stainless steel load cells, protection class **IP68**
- stainless steel shockproof hinged adjustable feet 60 mm Ø / M12 and with spirit level
- equipped with inspection hatch in which the junction box (**IP67**) is accommodated
- for installation in pit in the floor
- pitframe optionally available; prices excluded construction labor
- separate weight indicator, model ISC-XS in ABS plastic housing, separate, linked by 1,5 m cord, protection class IP54
- clearly readable, auto backlit LCD-display, 25 mm character height
- simple, water protected keypad with 5 function keys: zero, tare (manual, automatic or preset), print, on/off and a free programmable function key
- power: 12 V adaptor (included) or 4 AA batteries (excluded), removable battery housing for simple replacement of batteries
- functions: full range tare, automatic tare, high resolution weighing (10 x more accurate), net/gross or lb/kg indication, accumulative weighing, formula weighing, checkweighing, percentage weighing, piece counting, in/out truck weighing, hold- and peaklevel function
- supplied with 1x RS232/C interface for connecting PC, PLC etc. and supplied with 1x RS232/C interface for connecting (label)printer
- including IR-input for optional remote control

## Options i.a.


- pole for indicator
- infrared remote control
- USB interface (in stead of RS232/C)
- alibi memory
- RS-485 interface
- thermal ticketprinter / labelprinter
- simple software for Windows,
- connection cable from RS-232 to PC/printer
- different indicator with more functions
- stove enamelled pit frame
- wireless communication to PC/printer
- stainless steel platform top in stead of galvanised top




# Floor scale series S, pit version

## Versions

type	capacity	division	platform dim. l x w x h
S pit version- 10001000-300kg	300 kg	0.1 kg	1000 x 1000 x 90 mm
S pit version- 10001000-600kg	600 kg	0.2 kg	
S pit version- 10001000-1.5t	1500 kg	0.5 kg	
S pit version-12501250-1.5t	1500 kg	0.5 kg	1250 x 1250 x 90 mm
S pit version-12501250-3t	3000 kg	1 kg	
S pit version-12501500-1.5t	1500 kg	0.5 kg	1250 x 1500 x 115 mm
S pit version-12501500-3t	3000 kg	1 kg	
S pit version-15001500-1.5t	1500 kg	0.5 kg	1500 x 1500 x 115 mm
S pit version-15001500-3t	3000 kg	1 kg	
S pit version-15002000-1.5t	1500 kg	0.5 kg	1500 x 2000 x 130 mm
S pit version-15002000-3t	3000 kg	1 kg	
S pit version-15002000-6t	6000 kg	2 kg	1500 x 2000 x 150 mm
S pit version-15002500-3t	3000 kg	1 kg	1500 x 2500 x 180 mm
S pit version-15002500-6t	6000 kg	2 kg	
S pit version-15002500-10t	10000 kg	5 kg	
S pit version-20002500-3t	3000 kg	1 kg	2000 x 2500 x 180 mm
S pit version-20002500-6t	6000 kg	2 kg	
S pit version-20002500-10t	10000 kg	5 kg	

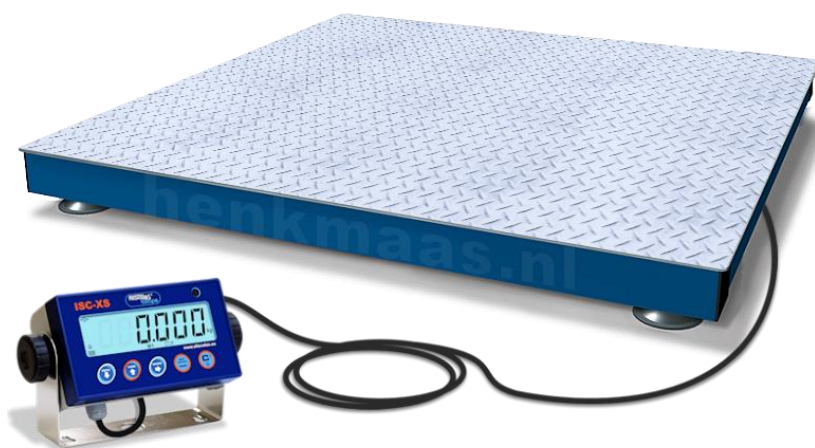

# Floor scale series S, pit version

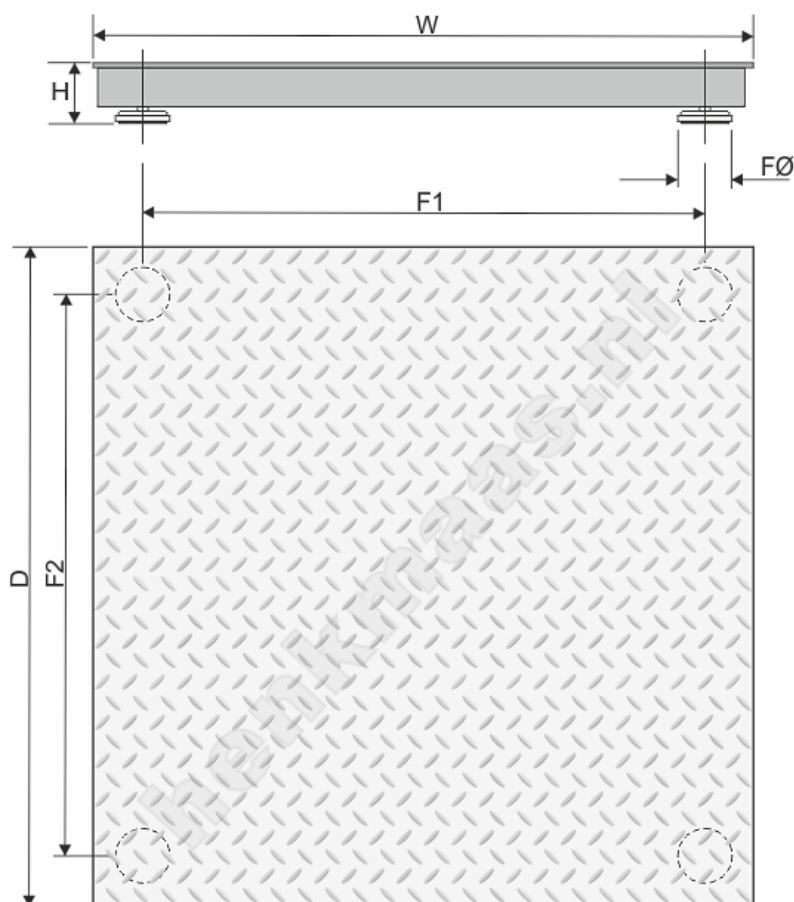

## Dimensions

W (Width)	D (Length )	Capacity	H	F1	F2	FØ
1000	1000	≤ 1500 kg	90	850	850	60
1250	1250	≤ 3000 kg	90	1070	1070	60
1250	1500	≤ 3000 kg	115	1070	1320	60
1500	1500	≤ 3000 kg	115	1320	1320	60
1500	2000	≤ 3000 kg	130	1300	1800	60
1500	2000	6000 kg	150	1300	1800	60
1500	2500	≤ 10000 kg	180	1280	2280	60
2000	2500	≤ 10000 kg	180	1780	2280	60

