

Explosion Protected Palletweigher

(excl. indicator)

model **PSATEX**




Suitable for use in hazardous areas. Protection class depending on applicable weighing indicator.

Properties

Pallet weigher

- capacity from 0-600 kg, 0-1500 kg, or 0-3000 kg
- equipped with 5 m connection cable to optional indicator
- dimensions palletweigher 1260 x 800 (l x w)
- low platformheight, only 75 mm
- equipped with 4 watertight load cells, protection class IP68
- version constructed of stainless steel AISI 304
- equipped with 4 adjustable stainless steel feet

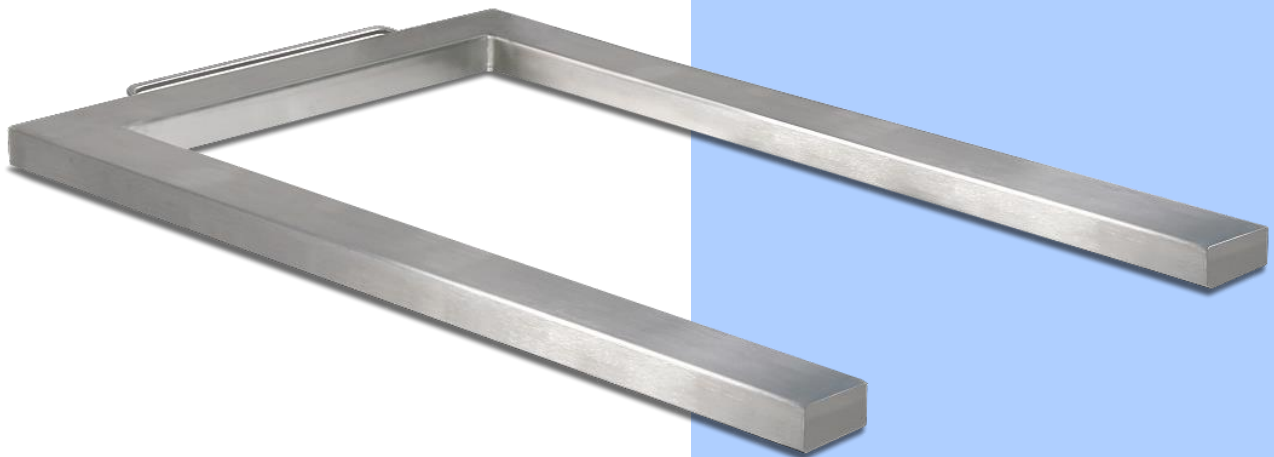

Note

- Verification only possible if connected to the INDATEX 2GD or INDATEX 3GD indicator

type	PSATEX-600	PSATEX-1500	PSATEX-3000
capacity	600 kg	1500 kg	3000 kg
division	0.2 kg	0.5 kg	1 kg
dimensions	1260 x 800 x 75 mm (l x w x h)		

