Electronic bench scale

Series WPT-R

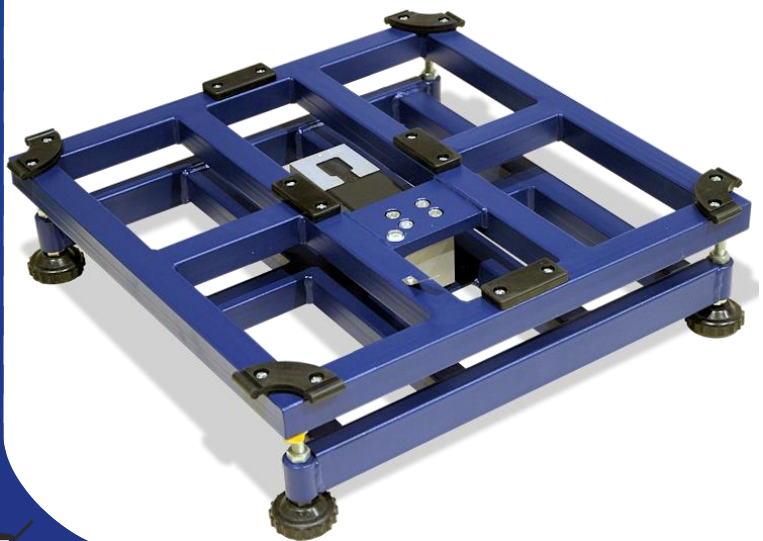

Properties

- **CE verifiable**, for legal trade
- ideal for a.o. warehouse, post room, industry, workshop etc.
- very suitable for mobile weighing
- excellent quality/ price-linking
- stainless steel platform; painted steel base frame
- for dimensions (excl. indicator): see next page
- weight indicator, model ISC-XS in ABS plastic housing, mounted at the frame in stainless steel bracket (tiltable)
- clearly readable backlit LCD-display, 25 mm character height
- simple, water protected keypad with 5 function keys: zero, tare (manual, automatic or preset), print, on/off and a free programmable function key
- power: 230 V adaptor (included) / 4x AA batteries(excluded), removable battery housing for simple battery exchange
- functions: tare, automatic tare, high resolution weighing (10x more accurate), net/gross indication, adding, formula weighing, checkweighing, percentage weighing, piece counting, in/out weighing, hold- and peak function
- supplied with 1x RS232/C interface for connection to PC, PLC etc. and supplied with 1x RS232/C interface for connection to (label)printer
- IR-input included for optional remote control

Options a.o.

- dual range division
- infrared remote control
- real-time clock
- USB interface (in stead of RS232/C)
- RS-485 interface
- WiFi interface; BlueTooth interface
- alibi memory
- thermal ticket printer / labelprinter
- different indicator
- simple software for Windows
- cord from RS-232 to PC/printer

M CE verifiable, class III (application for legal trade)

Electronic bench scale series WPT-R

Versions

type	capacity	division	platform dim. in mm
WPT-R-30-3kg	3 kg	1 g	300 x 300 (h 140)
WPT-R-30-6kg	6 kg	2 g	
WPT-R-30-15kg	15 kg	5 g	
WPT-R-30-30kg	30 kg	10 g	
WPT-R-3040-30kg	30 kg	10 g	300 x 400
WPT-R-3040-60kg	60 kg	20 g	
WPT-R-3040-150kg	150 kg	50 g	
WPT-R-40-30kg	30 kg	10 g	400 x 400
WPT-R-40-60kg	60 kg	20 g	
WPT-R-40-150kg	150 kg	50 g	
WPT-R-4050-60kg	60 kg	20 g	400 x 500
WPT-R-4050-150kg	150 kg	50 g	
WPT-R-4050-300kg	300 kg	100 g	
WPT-R-50-60kg	60 kg	20 g	500 x 500
WPT-R-50-150kg	150 kg	50 g	
WPT-R-60-60kg	60 kg	20 g	600 x 600
WPT-R-60-150kg	150 kg	50 g	
WPT-R-60-300kg	300 kg	100 g	

M CE verifiable, class III (application for legal trade)