

Electronic weighbridge series HM-WB

Electronic modular weighbridge with separate weighing platforms, composed of modules. Weighing capacities up to 60 tons, CE-verified.



Weight indicator with special firmware for vehicle weighing



Properties

- separated weighing platforms L and R, composed of modules
- the modular construction enables a quick installation and an easy removal, if necessary
- no crane is required for assembly and dismantling, the modules can be moved with a forklift truck
- weighing capacities up to 60 tons / division 20 kg, CE-verified
- total length weighing platforms excl. ramps: 600, 900, 1500 or 1800 cm; the total width is variable due to the separated platforms, as standard it is fixed at 300 cm
- **optional:** ramps, length approx. 400 cm
- made of high quality materials and suitable for placement on leveled stelcon plates (size LxWxH: 300 x 200 x 14 cm, 2 rows of 8 units) or a contiguous reinforced concrete floor of at least 2800 x 400 x 14 cm (l x w x h)
 - low profile weighing platforms (37 cm high), robust construction with anti-slip top of 8 mm thick lacquered steel plate
- corrosion-resistant paint finish
- waterproof, stainless steel analog load cells, protection class IP68
- dust and watertight connecting cables
- **including digital indicator**, model HP-Touch with firmware FW03
- including connecting cable with a length of up to 20 meters from the indicator to the weighbridge

Options i.a.

- ramps, length approx. 400 cm
- side rails to prevent the vehicle from driving off the side of the weighbridge
- stainless steel case for indicator
- alibi memory up to 120,000 weighings
- touch screen
- stand for indicator
- ethernet interface
- USB interface (i.p.v. RS232/C)
- thermal ticketprinter / labelprinter
- 2nd indicator with large SMD LED-display (100 mm high characters, readable up to more than 25 m away)



type	HM-WB-6-15	HM-WB-9-40	HM-WB-9-40	HM-WB-18-60
capacity	15 ton	40 ton	60 ton	60 ton
division	5 kg	20 kg	20 kg	20 kg
length excl. ramps	6 meter	9 meter	15 meter	18 meter

Electronic weighbridge


series HM-WB

-2-



Properties digital indicator HP-U-Touch

- splash water protected ABS plastic housing IP65
- backlit graphic display with touch screen technology, dim. 120x90mm (l x h)
- 1-key waterproof keyboard
- selectable QWERTY, AZERTY or QWERTZ keyboard integrated in the touch screen
- dimensions: 278 x 125 x 186 mm (w x d x h)
- suitable for use on the table, pole, or wall
- real-time clock and permanent data storage
- alibi memory, integrated on the motherboard
- **special multilanguage firmware FW03 for vehicle weighing**
- data storage of incoming / outgoing loads via ID code or registration number (up to 999 weightings)
- 15 configurable and printable ID texts, each 20 characters; code, batch ID, service ID, shift number, etc.
- database for 500 customers / suppliers with 2 alphanumeric descriptions of 20 characters each, linked tare, incoming total, outgoing total, net total, total of the weights
- database for 500 articles with alphanumeric description of 20 characters, linked tare, incoming total, outgoing total, net total, total of the weights
- database for 500 trucks with alphanumeric description of 20 characters, license plate (10 characters), linked tare, incoming total, outgoing total, net total, total of the weights
- 6 levels of resettable totals that can be printed independently: partial total, general total, large total, customer total, article total, truck total
- additional functions available with weigh software AllScales Easy for PC
- connectable to printers and labellers with free programming of the printout formats
- power: 110-240 Vac
- **CE-verified**

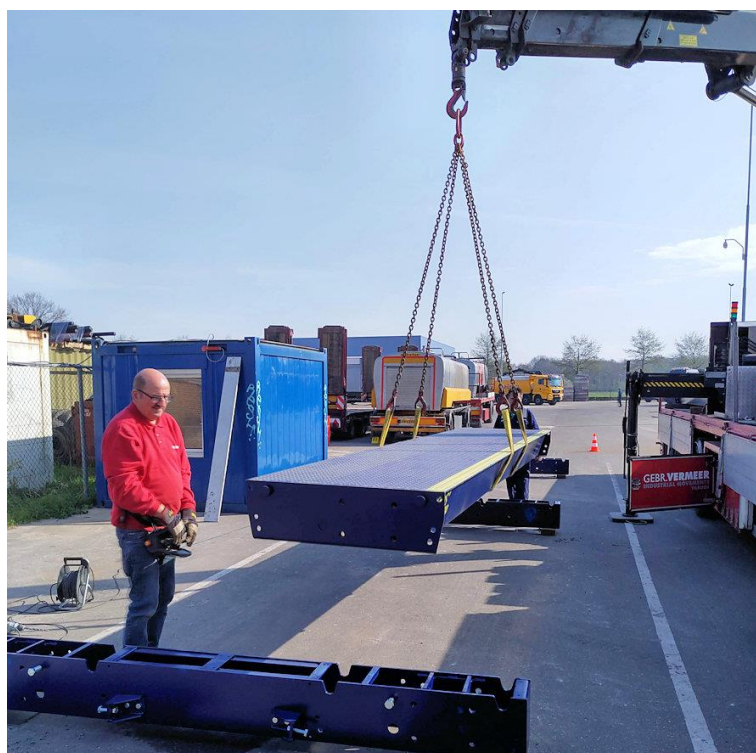

with special firmware for vehicle weighing



standard indicator HP-Touch



additional indicator (option)